

assigning an iButton in CoolCare.


This guide will take you through the steps of assigning an iButton to a staff member in CoolCare so they can clock in and out using the Nohmad clocking machine.

The easiest way to do this is by using the iButton keyboard reader.

Your iButton keyboard comes in two parts, the long USB cable and the iButton keyboard itself:



You will need to first plug the USB end into the computer you are using:

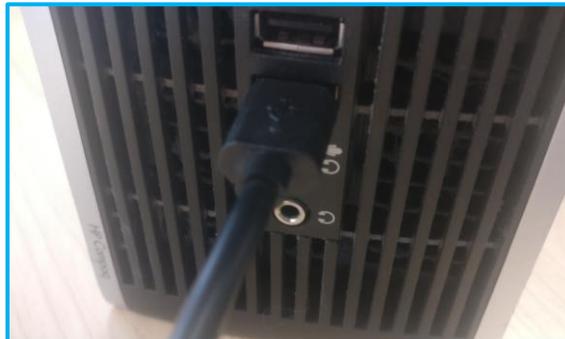

And then plug the Micro USB into the iButton keyboard itself:



Now log on to CoolCare, navigate to the **Staff** section, then **Staff Records**. In the staff List you need to find the staff member you want to assign the iButton to, you can either click their name in the staff list or use the search box to find them.

Pay No.	Full Name	Bank	Position	Start Date	Leave Date	Status
165234	Amelia Watson		Senior Carer	01/10/2021		OUT
3234443322	Beth Lynch		Senior Carer	01/07/2023		OUT
1234	Billy Smith		Care Assistant	01/11/2022		OUT
938293832	Carol Wise		Senior Carer	02/01/2023		OUT
2455	Catherine Lawson		RGN	01/11/2021		OUT
1565432	Claire Ennis		RGN	11/07/2022		OUT
1356	Courtney Wheeler		Care Assistant	01/11/2020		OUT
4533	Emily Galileo		Chef	01/11/2020		OUT
	Ethan Roberts	R	Maintenance	18/05/2023		OUT

Once you are in the staff record, navigate to the **T&A** tab and select **iButton Settings**.

On this page click in the **iButton Number** box and touch the iButton to the iButton keyboard. The number should appear in the box and save automatically. You'll know it's saved if you see the **Manually Clock In/Out** button underneath the iButton number.

Once the iButton is registered, the staff member will be able to clock in and out using the clocking machine and fob you registered. You'll also be able to add manual clocks to the staff record if they forget to clock in or out. For more information on manual clocks, please check our *Adding and Archiving Manual Clocks* guide.

Please Note: If you need to unassign an iButton from a member of staff, open their staff records and select **T&A - iButton settings**. Delete the iButton number and then save. This button can then be used for another member of staff.